

553,690

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number
WO 2005/068859 A1

(51) International Patent Classification⁷: **F16C 19/50**,
33/58

(21) International Application Number:
PCT/US2005/001289

(22) International Filing Date: 14 January 2005 (14.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/536,485 14 January 2004 (14.01.2004) US

(71) Applicant (for all designated States except US): **TIMKEN
US CORPORATION** [US/US]; 59 Field Street, Torrington,
CT 06790 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAYWARD, John**,
S. [US/US]; 182 Country Club Road, Torrington, CT 06790

(US). **BOBER, Thomas, R.** [US/US]; 58 Attawanhood
Trail, Amston, CT 06231 (US). **MCLARETY, Daniel, R.**
[US/US]; 82 Davis Road, Burlington, CT 06013 (US).


(74) Agent: **MASSINA, Glenn, M.**; Michael Best & Friedrich
LLP, 100 East Wisconsin Avenue, Milwaukee, WI 53202-
4108 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: **ROLLER BEARING WITH GEAR ASSEMBLY TO SYNCHRONIZE RACES**

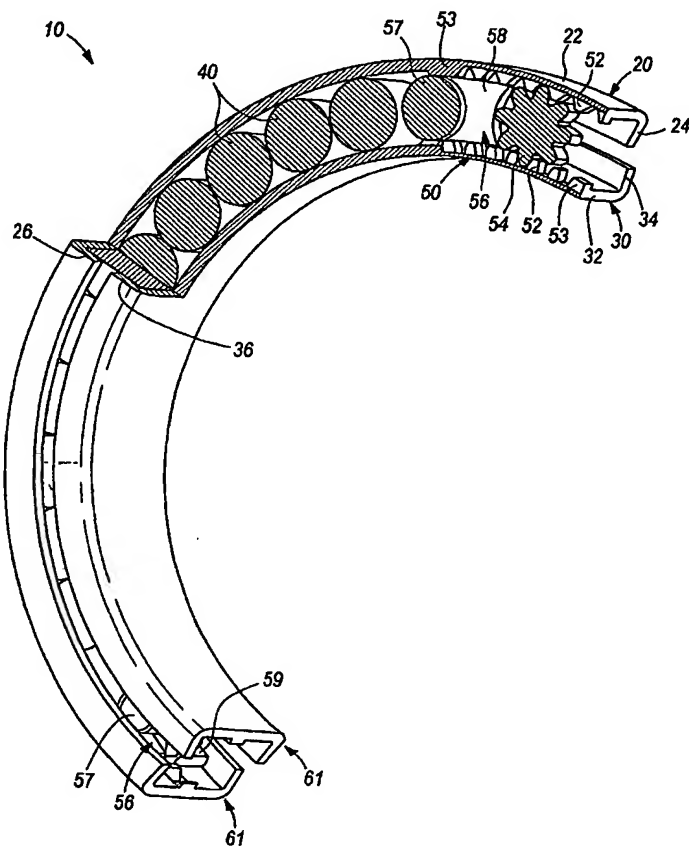

(57) Abstract: A roller bearing assembly (10) comprising radially inner and outer bearing races (20, 30) with a plurality of roller bearings (40) positioned therebetween. A first plurality of gear teeth (52) are provided in the outer bearing race (20). A second plurality of gear teeth (52) are provided in the inner bearing race (30) in alignment with the first plurality of gear teeth (52). A toothed gear (54) is positioned between and interengages with the first and second pluralities of gear teeth (52).

WO 2005/068859 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.